

4.2V-60V Vin, 2A, High Efficiency Step-down DCDC Converter with Programmable Frequency

FEATURES

- =715 093
- 5
- 31 4(
- 553 0
- =433
- + ,
- 433 0
- 7 0
-
- 433 45
-
-
-
- 0 + ,
-
- 0 0
- 0

APPLICATIONS

-

REVISION HISTORY

=

0

REV

REVISION

	9				
	:				
		1			
		1		1	
					1

RECOMMENDED OPERATING CONDITIONS

	0				
			75	93	
			31	8:	
			073	483	

ESD RATINGS

		+ , / 0 0 033405347	05	. 5	
	5347	+ , / 0 0 03350	018	. 318	
(1)	488	833			1
(2)	48:	583			1

THERMAL INFORMATION


+4, +5,			6: 16		
-5,	0 0		: 149		
-5,	0 0		49177		2
+4, +5,			: 41 :		
-5,	0 0		491 5		
+4,			1		
+ ,	/ 5955	/	1		
		59551	1		
-5,	840 / 70	1			
	1			840	
1				1	

ELECTRICAL CHARACTERISTICS

57 / 073	458 /	58 1			

			618	
			733	
		3/	5	8
		$\begin{array}{r} / \quad / \quad 0 \\ / \quad 0 \quad 8 \quad / \\ 533 \end{array}$	433	
	0	0	0	8
			553	
			31	5
			31	31
			31	3

TYPICAL CHARACTERISTICS

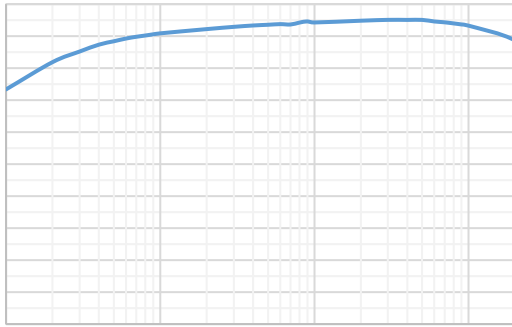

51

/ 8

61

/ 57

71


/ 57 / 61

81


91

: 1

FUNCTIONAL BLOCK DIAGRAM

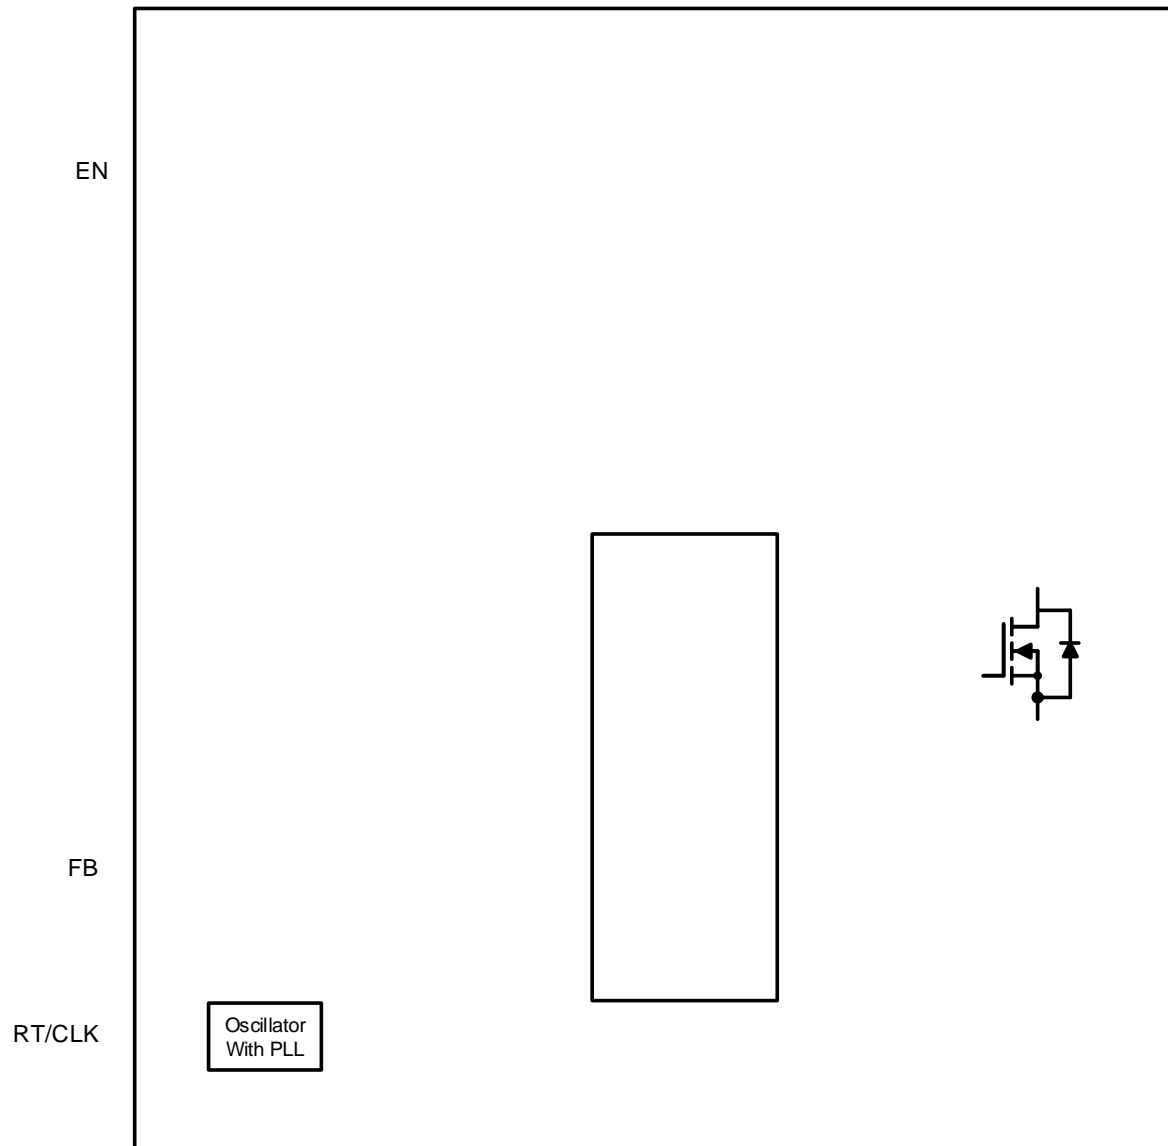


1



+4,

+5,

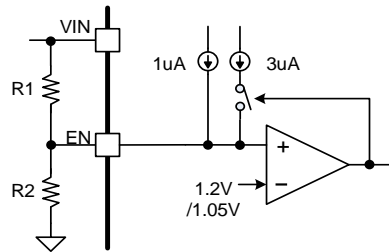

1

-
-

5955

1

4(

/

1

31

±4(

6

1

1

/

1

1

+6,

-
-

1

1

5955

1

/

433

1

45

1

1

2

7

2

38


1

2

431

2

/

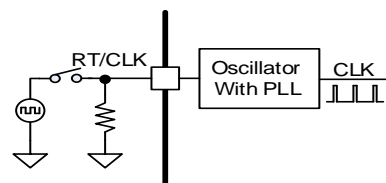

431

/

/

433

45

99

2

5 /

37 /

1

2

1

2

3 1

/

431

1

1

8 1

1

1 1

5353

1/ 1

= 5955



=
=
=
=



0 0

431

+43,

-
-
-
-
-

0 0

0

1

/

44

1

â Ç•6Sô+Ü"y5

+44,

-
-
-
-
-
-

+ ,
+ ,

1

/

1

/


/

1 1 / 1
 930 / 1 59551
 / 693 0460 1 693 0460 31 6 1
 0 / 1 0 1 1 0 1
 / / 1 47
 693 0460 3199 1 533 1 47/
 1 /
 +47,


0 0 / 1
 1 8 : 1
 314 , +3936, 1 1
 1 1 1
 481
 +48,
 5- / =
 +49,

1 /
 / 1
 4: 83(1
 +4: ,




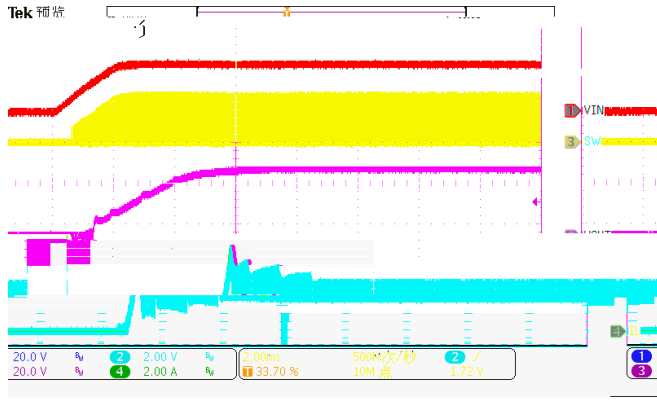


451 + 5 ,




461 + 5 ,

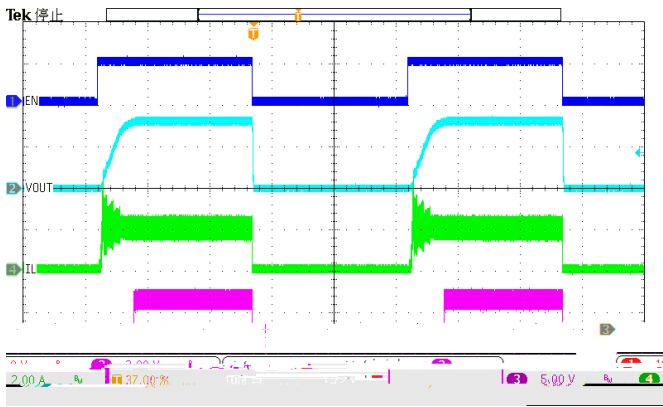


471 + ,

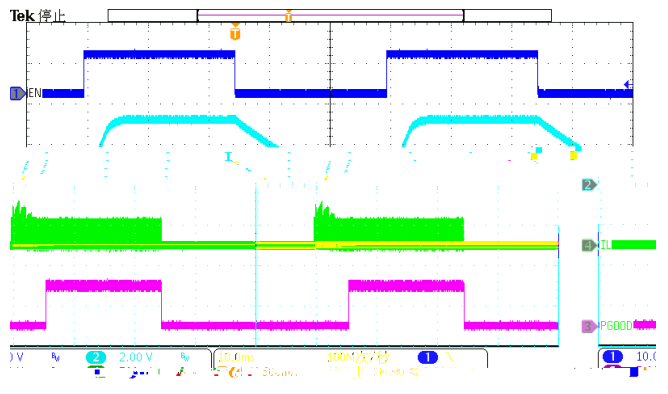

481 + 53 ,

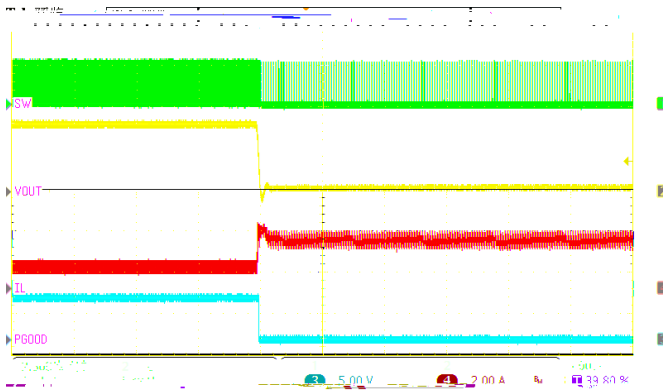

491 +4 ,

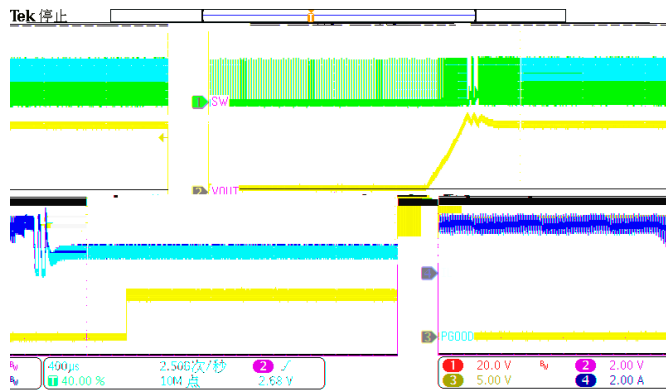

4: 1 + 4 ,





